


# VC-01 Handheld Calibrator

1gms output

159.2Hz

Battery power

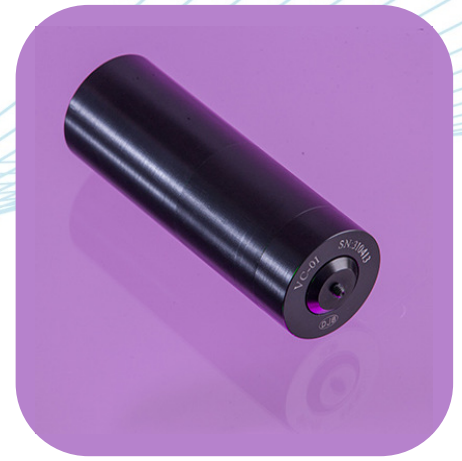

## Features

- Battery powered with automatic shutdown
- Lightweight, simple one button operation
- Stud adaptor included
- Rugged black anodised aluminium case
- Battery indicator.
- IP54 rated

	Metric	Imperial
Acceleration Amplitude (RMS)	9.81m/s <sup>2</sup> ±3%	1g
Vibration Frequency	159.2Hz ±0.5%	
Output Waveform	Sine	
Waveform distortion	≤5%	
Maximum Load	120gm	4.23oz
Working Temperature	0 to +55°C	32 to 131°F
Storage Temperature	-45 to +85°C	-49 to 185°F
Maximum Humidity %RH	95	
Weight approx.	500gm	17.64oz
Mounting	M5 tapped hole (variety of studs available)	
Case Material	Aluminium	
Dimensions	Ø52mm Diameter x 148mm (H)	Ø2.05in Diameter x 5.83in (H)
Auto Shutdown	50 seconds	
Power indicator	Normal: Green Low Battery: Orange	

Batteries required: x1 PP3 (9VDC)

Please be aware batteries do not come supplied with these units

Please enquire for the mounting studs available

三協インタナショナル株式会社 03-3662-8100

### DJB Instruments (UK) Ltd

Finchley Avenue,  
Mildenhall, Suffolk IP28 7BG

A UK company with UK-based manufacturing, assembly and calibration in-house.

**Tel** +44 (0)1638 712 288  
**Email** sales@djbinstruments.com  
**Web** www.djbinstruments.com

DJB Iss.6



ISO 9001 – 00025363