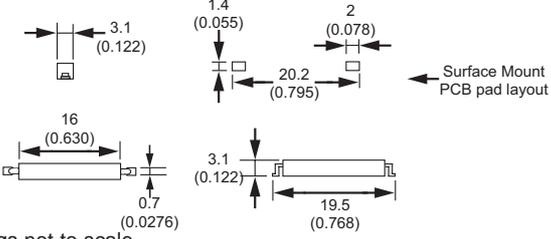


## Surface Mount Reed Switch - Normally Open Contacts

Part Numer: PRA-M1-DA05

### Product Data Sheet

PICTURE	DIMENSIONS
	 <p style="text-align: right;">← Surface Mount PCB pad layout</p>
	<p>Drawings not to scale All dimensions in mm (inches) nominal.</p>

SPECIFICATION	
Contact Form / Style	Normally Open
Switching Voltage	150 Vac
Switching Current	0.5A
Switching Capacity (Resistive)	10VA
Contact Resistance	150mOhms Max.
Switch AT before crop and form	15 - 20 AT
Switching Distance	Dependent on magnet
Operating Temperature	-40°C + 125°C
Case Material	Polyphenolic Sulphide

### Applications Include

- Position and limit sensing.
- Linear actuators.
- Security system switch.
- Door Switch.

### Options

- Higher Voltage version available in same package size, please ask our sales office for details.

### Did you know we also sell?



Rev. No.	Revision Note	Date	Signature
2	Datasheet Redesign	28-06-06	NG



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : +44 (0)1255 862236

[www.assemtech.co.uk](http://www.assemtech.co.uk)

Fax: +44 (0)1255 862014

©2006 Copyright Assemtech Europe Ltd, Unit 7, Rice Bridge Industrial Estate, Thorpe - Le - Soken, Essex, CO16 0HL, ENGLAND.