
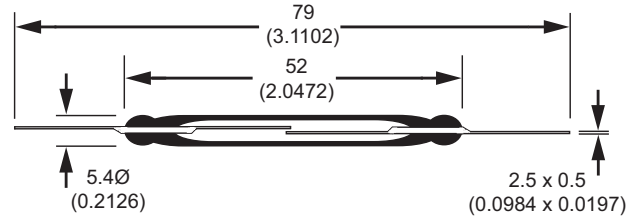


Part Number : GC1523
Reed Switch - Standard - Normally Open Contacts
Product Data Sheet

PICTURE	DIMENSIONS
---------	------------

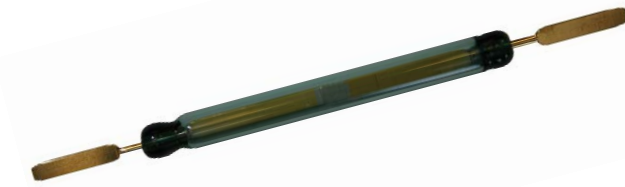

 File Number E103299

 **RoHS Compliant**

Drawings not to scale
 All dimensions in mm (inches) nominal.

SPECIFICATION		
---------------	--	--

Contact Form		A (Normally Open)
Contact Material		Rhodium
Switching Capacity	Max.	120 VA
Switching Voltage	Max.	250 VAC/DC
Switching Current	Max.	3.0 A
Carrying Current	Max.	5.0 A
Dielectric Strength	Min.	800 VDC
Contact Resistance	Max.	80 mOhms
Insulation Resistance	Min.	10 ¹¹ Ohms
Pull - In - Sensitivity		75 - 95 AT
Drop - Out - Sensitivity	Min.	30 AT
Operate Time Without Bounce	Max.	3.5 ms
Bounce Time	Max.	0.5 ms
Release Time	Max.	0.20 ms
Resonant Frequency	Typ.	900 Hz
Operating Frequency	Max.	100 Hz
Vibration (10-1000Hz)		35 g
Shock (11 ms)		50 g
Capacitance	Typ.	0.8 pF
Operating Temperature Range	Deg.	-40°C + 125°C
Test Coil	Type	1500

ORDERING INFORMATION	NOTES
----------------------	-------

PART NUMBER GC 1523 75 95

- Type _____
- Minimum Sensitivity (AT) _____
- Maximum Sensitivity (AT) _____

Example: Type GC1523 Standart Sensitivity. Pull-in sensitivity between 75 - 95AT is PART NO: GC 1523 75 95.
 Available in ranges of 5 AT e.g: 75-80, 80-85, etc.

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

REV. NO.	REVISION NOTE	DATE	SIGNATURE
2	Datasheet Redesign	23-05-07	LG

TAKE A LOOK AT OUR VARIETY OF PRODUCTS



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900 www.comus-intl.com Fax : (1) 973 777 8405

Assemtech, UK: +44 (0) 1255 862236 - Belgium: + 32 (0)12 390400 - France: + 33 (0) 1 43 96 86 10
 ©2007 Copyright Comus International, 454 Alwood Road, Clifton NJ 07012, USA.

三協インタナショナル株式会社

東京: TEL.03-3662-8100 大阪: TEL.06-6372-5843 名古屋: TEL.052-709-1781