




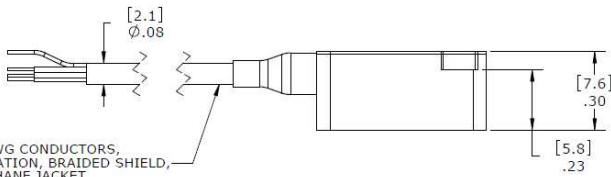

DIMENSIONS

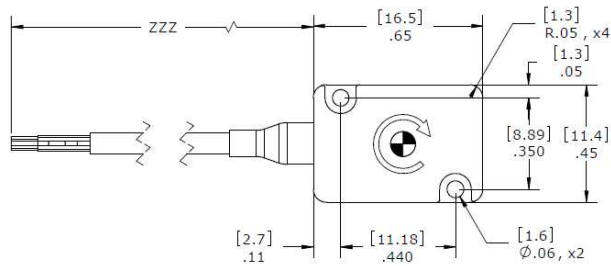

5x, #30 AWG CONDUCTORS,
PFA INSULATION, BRAIDED SHIELD,
POLYURETHANE JACKET

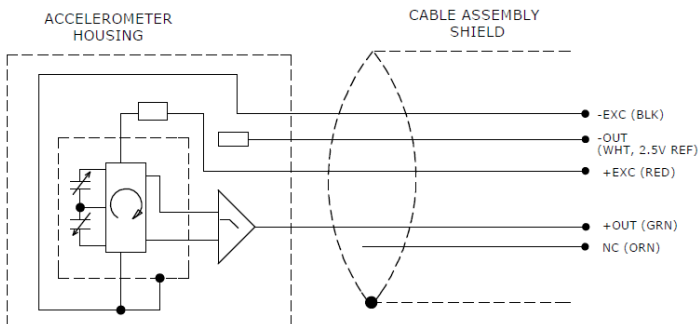

MODEL 620

Angular Rate Sensor

SPECIFICATIONS

- ± 500 to $\pm 50,000^\circ/\text{sec}$ Range
- Silicon MEMS, DC Response
- Insensitive to Shock
- Small, Lightweight Package

The Model 620 Angular Rate Sensor is a small analog gyroscope designed specifically for automotive safety testing and other system designs requiring accurate measurement of angular velocity. The Model 620 series utilizes silicon MEMS sensing elements with custom electronics and packaging to produce an angular rate sensor that is highly reliable even under excessive shock and vibration environments. A wide selection of ranges is available for your specific applications.

FEATURES

- ± 500 to $\pm 50,000^\circ/\text{sec}$ Ranges
- 7-16Vdc Excitation (5Vdc option)
- -40 to $+105^\circ\text{C}$ Temperature Range
- Shock Resistant Package
- Low Cross-Axis Sensitivity

APPLICATIONS

- Auto Safety Crash Testing
- Dummy Instrumentation
- Pedestrian Impact
- Rollover Testing
- Motorsports
- Biomechanics Testing
- Robotic System Design
- Weapons Design

MODEL 620

Angular Rate Sensor

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C and 12Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters								Notes
DYNAMIC								
Dash Number	-0500	-1500	-6000	-12K	-18K	-24K	-50K	See Ordering Info
Range (deg/sec)	±500	±1500	±6000	±12K	±18K	±24K	±50K	
Sensitivity (mV/deg/sec)	4.00	1.33	0.333	0.167	0.111	0.083	0.040	Not ratiometric
Frequency Response (Hz)	0-1000	0-1000	0-1000	0-2000	0-2000	0-2000	0-3300	+1dB/-3dB
Non-Linearity (%FSO)	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5	±0.5	BFSL
Cross-Axis Sensitivity (%)	<1	<1	<1	<1	<1	<1	<1	
Shock Limit (g)	3000	3000	3000	5000	5000	5000	5000	
Residual Noise (mV RMS)	3.66	1.20	2.38	1.22	1.20	1.20	1.50	Passband
ELECTRICAL								
Zero Acceleration Output (mV)	±100							Differential
Excitation Voltage (Vdc), Model 620	7 to 16							
Excitation Voltage (Vdc), Model 620M1	5.0 ±0.25							
Excitation Current (mA)	<8							
Influence of Linear Acceleration (deg/sec/g)	0.1							
Common Mode Voltage (Vdc)	2.5							±5%
Full Scale Output Voltage (Vpk)	±2							±15%
Output Resistance (Ω)	400							
Insulation Resistance (MΩ)	>100							@100Vdc
Turn On Time (msec)	<100							
Ground Isolation	Isolated from Mounting Surface							
ENVIRONMENTAL								
Thermal Zero Shift (%FSO)	±2.5							-40 to +105°C
Thermal Sensitivity Shift (%)	±2.0							-40 to +105°C
Operating Temperature (°C)	-40 to +105							
Humidity (Active Element & Electronics)	Hermetically Solder Seal							
Humidity (Housing)	Epoxy Sealed, IP65							
PHYSICAL								
Case Material	Anodized Aluminum							
Cable	5x, #30 AWG Conductors, PFA Insulated, Braided Shield, PU Jacket							
Weight (cable not included)	3 grams							
Mounting	2x #0-80							
Mounting Torque	4 lb-in (0.45 N-m)							
Calibration supplied:	CS-ARLIN	NIST Traceable Linearity Calibration to FS Range						
Supplied accessories:	AC-A04531	2x #0-80 (3/8 length) Socket Head Cap Screw and Washer						
Optional accessories:	AC-A04532 121	Triaxial Mounting Block 3-Channel Precision Low Noise DC Amplifier						

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

MODEL 620

Angular Rate Sensor

ORDERING INFORMATION

PART NUMBERING Model Number+Range+Cable Length+Options

620-GGGG-CCC-ZZZ

| | | | Options (contact factory for Lemo & Dallas ID chip options, otherwise leave blank)

| | | Cable (360 is 360 inches)

| | Range (-0500 is 500deg/sec, -1500 is 1500deg/sec, -50K is 50,000deg/sec)

| Model (620 is 7 to 16Vdc excitation, 620M1 is 5Vdc excitation)

Example: 620-1500-360

Model 620, 1500deg/sec, 360" (30ft) Cable, No Options

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1000 Lucas Way
Hampton, VA 23666
USA
Tel: +1-800-745-8008 or
+1-757-766-1500
Fax: +1-757-766-4297
Sales: pvg.cs.amer@meas-spec.com

EUROPE

MEAS France SAS
a TE Connectivity Company
26 Rue des Dames
F78340 Les Clayes-sous-Bois
France
Tel: +33 (0) 130 79 33 00
Fax: +33(0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.