

# LCF-2330-L Series Dual Axis Inclinometer

## 4-20mA Output




Making Sense Out of Motion...

The Jewell LCF-2330-L Series Inclinometer is a dual axis version of the rugged and high accuracy LCF Series.



The LCF-2330-L offers the same performance and reliability as the standard LCF-2330 series, but with a convenient 4-20mA output signal. This solution is ideal for applications that require long cable runs such as platform/radar leveling and geotechnical monitoring.

Dimensional Drawing: LCF-2330-L Inclinometer Series

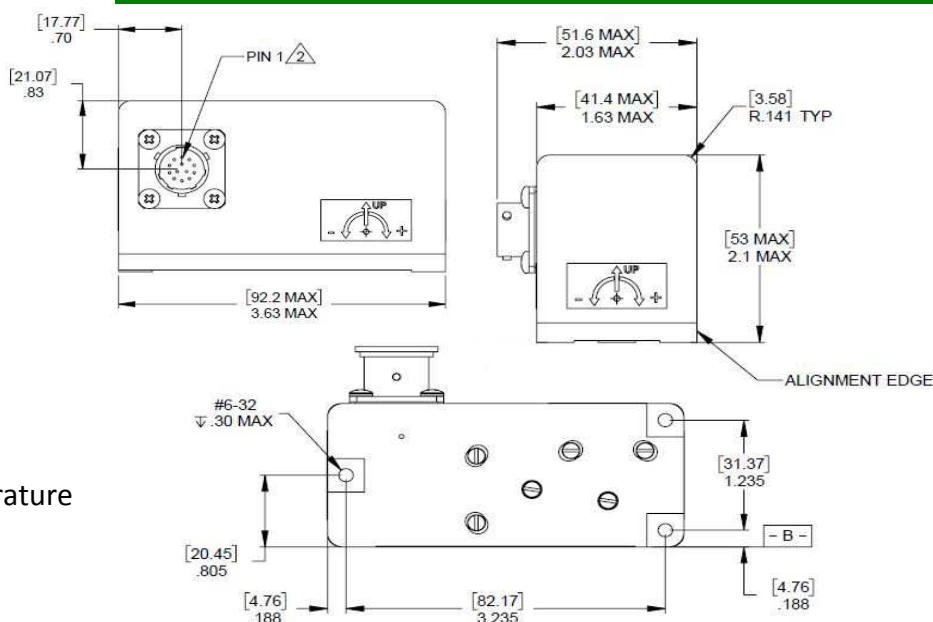

### Features & Benefits

- $\pm 1^\circ$  to  $\pm 90^\circ$  Input Full Range
- Micro Radian Resolution
- Available Internal Temp Sensor
- 4-20mA Output Signal
- Superior  $0^\circ$  Output Stability over Temperature
- Low Impedance Output

### Applications

- Radar & Antenna Leveling
- Weapons Platform Leveling
- Barge and Offshore Platform Control
- Deviation Surveys
- 2-Axis Machine Tool Leveling
- Bridge Structural Monitoring
- Submersible Control Feedback
- Offshore Platform Stability
- Production/Manufacturing Process Equipment for Aerospace Industry

Pin-Out: LCF-2330-L Inclinometer Series

CONNECTOR	
PIN	FUNCTION
1	+20 TO +30 VDC
2	N/C
3	N/C
4	X-AXIS OUTPUT SIGNAL
5	POWER COMMON
6	Y-AXIS OUTPUT SIGNAL
7	N/C
8	N/C
9	N/C
10	N/C
11	N/C
12	N/C
13	N/C

Rev A

Jewell Instruments LLC, 850 Perimeter Road, Manchester, NH 03103  
 sales@jewellinstruments.com • www.jewellinstruments.com • Tel (800) 227-5955

三協インタナショナル株式会社  
 東京03-3662-8100 名古屋052-709-1781 大阪06-6372-5843

# LCF-2330-L Series Dual Axis Inclinometer

## 4-20mA Output

### LCF-2330-L Inclinometer Specifications

#### PERFORMANCE

Input Range, deg.	±1.0	±3	±14.5	±30	±90
Full Range Output (FRO), mA, ±1 %	4-20	4-20	4-20	4-20	4-20
Nonlinearity, % FRO, maximum	0.05	0.05	0.03	0.03	0.04
Scale Factor, mA/g, nominal	458.4	152.9	32.0	16.0	8.0
Scale Factor Temp Sensitivity, PPM/°C, maximum	300	300	100	100	100
Bandwidth, (-3 dB), Hz, nominal	0.5	2.0	15.0	20.0	30.0
Transverse Axis Misalignment, deg, maximum	±0.25	±0.5	±0.5	±0.5	±0.5
Output at 0° Tilt, mA, maximum	12 ±0.6	12 ±0.6	12 ±0.3	12 ±0.3	12 ±0.3
0° Output Temp Sensitivity, mA/°C, maximum	0.024	0.009	0.002	0.001	0.001
Resolution and Threshold, μradians, maximum	1	1	1	1	1


#### ELECTRICAL

Input Voltage, VDC	+20 to +30
Input Current, mA, maximum	45
Output Noise, mArms, maximum	0.01

#### ENVIRONMENTAL

Operating Temperature Range	-40°C to +80°C
Storage Temperature Range	-60°C to +90°C
Vibration	20 grms
Shock	1000g, 1 msec, 1/2 sine
Seal	MIL-STD 202, Method 112
Weight	8.1 oz.

- Notes: 1 - Full range is defined as "from negative full input angle to positive full input angle."  
 2 - Nonlinearity is specified as deviation of output referenced to theoretical sine function value, independent of misalignment.

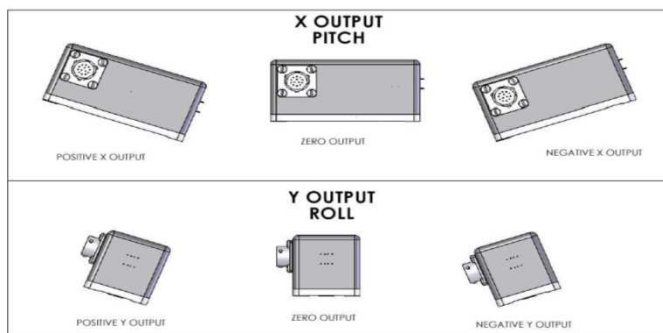

#### How to Order:

