





Part Number: CW1725 Series

Tip-Over Switch Product Data Sheet

PICTURE



✔ RoHS Compliant

OPERATION NORMALLY CLOSED AT VERTICAL 15° - 35° 15° - 35° **OPEN OPEN** WORKING POSITION **HORIZONTAL**


FEATURES


- Resistant to Ambient Environmental Conditions
- Case Material: Tin Plated
- Customization Available
- · Hermetically Sealed & Inert Gas Filled
- Invertibility Protected


| GENERAL SPECIFICATIONS | |
|------------------------|----------------------------|
| Contact Capacity | 0.25 A, 60 V MAX, 3 VA MAX |
| Contact Resistance | 30 Ω MAX at 5 VDC |
| Break Angle | 15° to 35° from vertical |
| Remake Angle | 8° MIN from vertical |
| Operating Temperature | -37° to 100°C |


DIMENSIONS

Click drawings for more information.

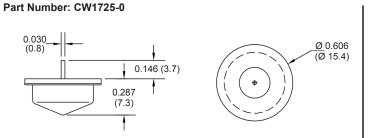



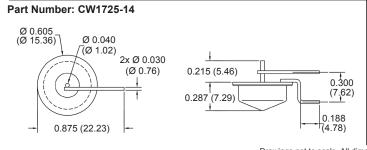

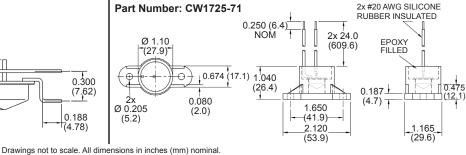

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405










Part Number: CW1725 Series

Tip-Over Switch Product Data Sheet


DIMENSIONS

Click drawings for more information.

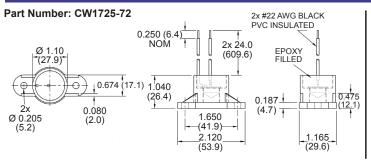

Drawings not to scale. All dimensions in inches (mm) nominal.

TAKE A LOOK AT OUR VARIETY OF PRODUCTS



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405