

## Reed Switch - Compact - Change-Over Contacts


Part Number : GC3336

### Product Data Sheet

#### PICTURE



#### DIMENSIONS

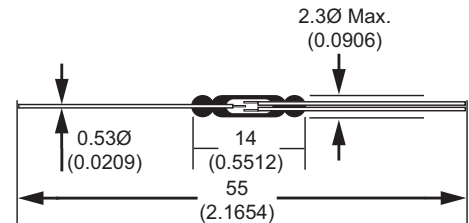

 File Number E103299

 RoHS Compliant

Drawings not to scale  
All dimensions in mm (inches) nominal.

#### SPECIFICATION

Contact Form		Change-Over
Contact Material		Rhodium
Switching Capacity	Max.	20 VA
Switching Voltage	Max.	150 VAC/DC
Switching Current	Max.	1.0 A
Carrying Current	Max.	2.0 A
Dielectric Strength	Min.	200 VDC
Contact Resistance	Max.	150 mOhms
Insulation Resistance	Min.	10 <sup>9</sup>
Pull - In - Sensitivity		15 - 30 AT
Drop - Out - Sensitivity	Min.	5
Bounce Time	Max.	0.6 ms
Release Time	Max.	0.5 ms
Resonant Frequency	Typ.	-
Operating Frequency	Max.	250 Hz
Vibration (10-1000Hz)		20 g
Shock (11 ms)		50
Capacitance	Typ.	0.8 pF
Operating Temperature Range		-40°C + 125°C
Test Coil	Type	1035

#### NOTE

- When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118in.) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.
- We offer a crop and form service for Reed Switches to be customized to your specification.

#### Ordering Information

PART NUMBER **3336 15 30**

- Type \_\_\_\_\_
- Minimum (AT) Sensitivity \_\_\_\_\_
- Maximum (AT) Sensitivity \_\_\_\_\_

#### Example:

Type 3336 Standard Sensitivity. Pull-in sensitivity between 15-30 AT is PART NO: 3336 15 30  
Available in ranges of 5 AT e.g: 15-20, 20-25 etc.

#### Did you know we also sell?



Rev. No.	Revision Note	Date	Signature
2	Datasheet Redesign	05-06-06	NG



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone : (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

©2006 Copyright Comus International Ltd, 454 Allwood Road, Clifton, New Jersey, 07012, USA.

三協インタナショナル株式会社  
東京: TEL.03-3662-8100 大阪: TEL.06-6372-5843 名古屋: TEL.052-709-1781