


PC Board Mountable Pressure Sensor Temperature Compensated 0 – 100mV Output Gage, Absolute, Differential Current/Voltage Excitation

1200 Series

The 1200 series is a temperature compensated, piezoresistive silicon pressure sensor packaged in a dual-in-line configuration.

Integral temperature compensation is provided over a wide temperature range using laser-trimmed resistors. An additional laser-trimmed resistor is included to normalize pressure sensitivity variations by programming the gain of an external differential amplifier.

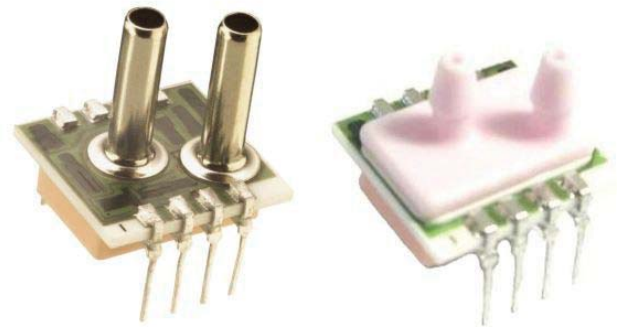

FEATURES

- Dual-in-Line Package
- 1.0% Interchangeable Span (provided by gain set resistor)
- Solid State Reliability
- Wide Compensated Temperature Range

APPLICATIONS

- Medical Instruments
- Airspeed and Altitude Measurements
- Process Control
- Factory Automation
- Vacuum Measurement
- Handheld Calibrators
- Leak Detection
- Sleep Apnea
- Respirators/Ventilators
- Air Duct Flow

Product Definition

Model	Pressure Ranges	Type (G = Gage A = Absolute D = Differential)	Span	Supply		Compensated Temperature	Unique Feature
				Voltage	Current		
1210 Sub psi	0 - 5, 10" in H ₂ O	G, D	40mV		1.5mA	0°C to 60°C	Barbed port option Current excitation
1210 1psi	0 - 1psi	G, D	100mV		1.5mA	0°C to 50°C	Barbed port option Current excitation
1210 Standard	0 - 2, 5, 15, 30, 50, 100psi	G, A, D	100mV		1.5mA	0°C to 50°C	Barbed port option Current excitation
1220 1psi	0 - 1psi	G, D	50mV	1.235Vref		0°C to 50°C	Voltage excitation
1220 Standard	0 - 2, 5, 15, 30, 50, 100psi	G, A, D	50mV	1.235Vref		0°C to 50°C	Voltage excitation
1230 UltraStable™	0 - 15, 30, 50, 100psi	G, A, D	100mV		1.5mA	-20°C to +85°C	Current excitation UltraStable™
1240 UltraStable™	0 - 15, 30, 50, 100psi	G, A, D	50mV	1.235Vref		-20°C to +85°C	Voltage excitation UltraStable™

NORTH AMERICA

Measurement Specialties
45738 Northport Loop West
Fremont, CA 94538
Tel: 1-800-767-1888
Fax: 1-510-498-1578
Sales: pfg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-sous-Bois, France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
Sales: pfg.cs.emea@meas-spec.com

ASIA

Measurement Specialties
(China), Ltd.
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Tel: +86 755 3330 5088
Fax: +86 755 3330 5099
Sales: pfg.cs.asia@meas-spec.com

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.